


## Forklift Jack & Support Stand



**FJ40/50**

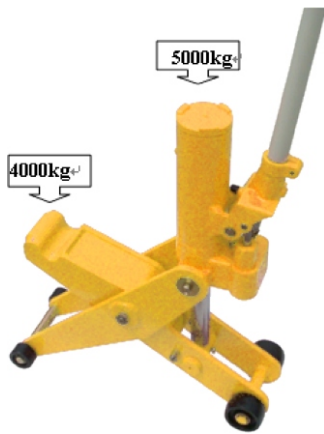

**FJS40**



**FJS70**



**FS120/FS140/FS180**



**HJ50/100/250**



**SJ15/SJL15/SJ30/SJL30/SJ50/SJL50/SJ100/SJL100**

## Specification Data

Specification	Liftstar Model		FJ40/50	
	Lifting position		Low position	High position
	Rated lifting capacity	kg	4000	5000
	Min. height	mm	65	414
	Max. height	mm	425	720
	N.W./G.W.	kg	45/48	
	Packing size	mm	740×280×350	

① FJ(S):Forklift Jack (Single Touch Point)

Specification	Liftstar Model		FJS40	FJS70
	Rated lifting capacity	kg	4000	7000
	Min. height	mm	65	65
	Max. height	mm	406	420
	N.W./G.W.	kg	33/35	48/51
	Packing size	mm	700×240×460	800×300×560

Specification	Liftstar Model		FS120	FS140	FS180
	Used with forklift jack		FJ40/50	FJS40	FJS70
	Capacity / per pair	kg	12000	14000	18000
	Adjustable range	mm	242~420	242~400	242~415
	N.W.	kg	13	13	16
	Packing size	mm	240×240×260	240×240×260	240×240×260

② FS:Forklift Support Stand

Specification	Liftstar Model		HJ50	HJ100	HJ250
	Rated lifting capacity	kg	5000	10000	25000
	Lifting range of toe	mm	25~230	30~260	58~273
	Lifting range of top	mm	368~573	420~650	505~720
	Load on the operating handle	N	≤380	≤400	≤400
	N.W.	kg	25	35	102
	Packing size	mm	370×200×440	380×230×500	530×350×610

③ HJ:Hydraulic Jack

Specification	Liftstar Model		SJ15/SJL15	SJ30/SJL30	SJ50/SJL50	SJ100/SJL100
	Rated lifting capacity	kg	1500	3000	5000	10000
	Lifting range of toe	mm	65~415/30~350	70~420/30~350	70~370/30~300	80~380/35~300
	Lifting range of top	mm	725~1075	725~1075	725~1025	800~1100
	Load on the operating handle	N	≤280	≤280	≤280	≤400
	N.W.	kg	13.5/16	22/25	28/32	46/55
	Packing size	mm	220×160×770	230×215×770	260×230×770	830×280×330

④ SJ:Steel Jack  
L:Super Low Toe