

Carton Clamp



Let the
forklift
become a
universal
forklift



Functions & Applications

Carton clamp can handle and stack various goods packed in cartons securely and efficiently without working platform. It is widely used in tobacco industry and household appliances industry, etc.

Features

- Proven durable T-beam sliding pair, reliable strength, long service life
- Superior arm-slide bearing for extended service life
- Thin arm designed, easy to permit close stacking
- Self-Adjusted oil pressure with intelligent control valve
- Vulcanized rubber pads design, economically
- Evenly clamp force
- Excellent driver visibility

Carton Clamp

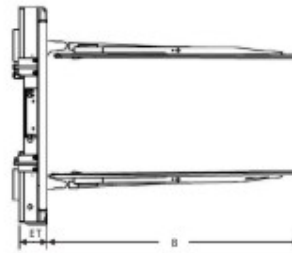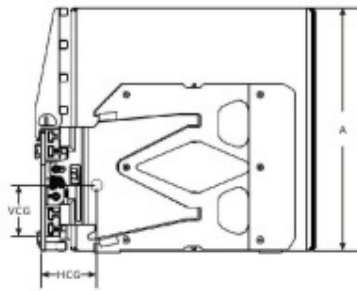

Capacity@ Load Center	Catalog Order No.	Mounting Class	Opening Range	Arm Height	Arm Length	Vertical Center of Gravity	Weight	Effective Thickness	Horizontal Center of Gravity
(kg@mm)			(mm)	A (mm)	B (mm)	VCG (mm)	(kg)	ET (mm)	HCG (mm)
700@380	ZXC07D-B001	II	560-1930	1220	760	330	503	127	325
700@510	ZXC07D-B002	II	560-1930	1220	1015	340	600	127	368
700@535	ZXC07D-B003	II	560-1930	1220	1065	340	604	127	368
700@585	ZXC07D-B004	II	560-1930	1220	1170	345	651	127	427
700@610	ZXC07D-B005	II	560-1930	1220	1220	345	660	127	429
1150@380	ZXC11D-B001	II	560-1930	1220	760	330	503	127	325
1150@510	ZXC11D-B002	II	560-1930	1220	1015	340	600	127	368
1150@535	ZXC11D-B003	II	560-1930	1220	1065	340	604	127	368
1150@585	ZXC11D-B004	II	560-1930	1220	1170	345	651	127	427
1150@610	ZXC11D-B005	II	380-1530	1220	1220	320	650	127	439
1150@600	ZXC11D-B006	II	560-1930	1220	1220	345	660	127	429
1600@510	ZXC16D-B004	II	560-1930	1220	1015	325	644	127	422
1600@535	ZXC16D-B002	II	560-1930	1220	1065	325	678	127	427
1600@585	ZXC16D-B003	II	560-1930	1220	1170	315	696	127	447
1600@610	ZXC16D-B001	II	560-1930	1220	1220	320	705	127	450
1500@660	ZXC15D-B001	II	560-1930	1220	1320	315	753	127	472
1500@685	ZXC15D-B002	II	560-1930	1220	1370	315	760	127	475
1400@710	ZXC14D-B001	II	560-1930	1220	1420	315	770	127	483
1600@510	ZXC16D-B005	II	560-1930	1370	1015	355	674	127	429
1600@535	ZXC16D-B006	II	560-1930	1370	1065	355	680	127	432
1600@585	ZXC16D-B007	II	560-1930	1370	1170	350	728	127	455
1600@600	ZXC16D-B008	II	560-1930	1370	1220	350	735	127	457
1500@660	ZXC15D-B003	II	560-1930	1370	1320	350	785	127	478
1400@685	ZXC14D-B002	II	560-1930	1370	1370	350	792	127	480
1600@510	ZXC16D-B009	II	560-1930	1525	1015	390	703	127	434
1600@535	ZXC16D-B010	II	560-1930	1525	1065	390	710	127	437
1600@585	ZXC16D-B011	II	560-1930	1525	1170	385	758	127	460
1600@600	ZXC16D-B012	II	560-1930	1525	1220	385	767	127	462
1500@660	ZXC15D-B004	II	560-1930	1525	1320	380	814	127	485
1450@685	ZXC14D-B003	II	560-1930	1525	1370	380	824	127	488
1360@762	ZXC14D-C001	III	960-2330	1372	1524	320	854	162	498
1360@762	ZXC14D-B004	II	960-2330	1372	1524	320	850	127	488
2300@510	ZXC23D-C001	III	535-1850	1525	1015	450	899	152	485
2300@535	ZXC23D-C002	III	535-1850	1525	1065	450	906	152	488
2300@560	ZXC23D-C003	III	535-1850	1525	1120	450	910	152	490
2300@585	ZXC23D-C004	III	535-1850	1525	1170	430	951	152	513
2300@640	ZXC23D-C005	III	535-1850	1525	1220	430	958	152	516