

Sideshifter



Features

- Integrate cylinder and sideshifter frame into a component, saving room and widening the view
- Easily installed, directly connected to fork carriage
- The lower bearings used wear-resistant nylon-material to ensure smoothly move
- Highly efficiency, easy maintenance and operation


Functions & Applications

Sideshifter is the most common attachment installed in forklift, which is available for sideshifting in both directions, greatly improves the flexibility and efficiency of the forklift accordingly. It is suitable for various occasions using forklift for handling and stacking.


Let the
forklift
become a
universal
forklift

Sideshifter

F-Series

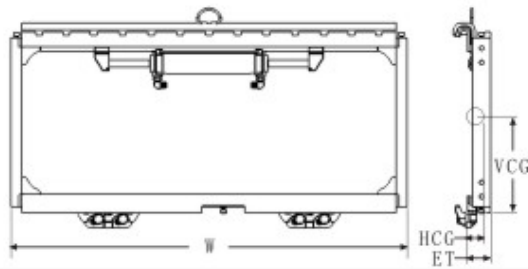

D-Series

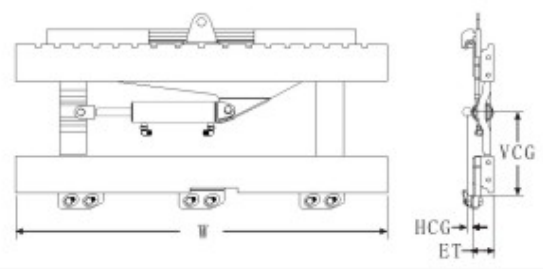

Capacity@ Load Center	Catalog Order No.	Mounting Class	Minimum Truck Carriage Width	Carriage Width	Vertical Center of Gravity	Weight	Effective Thickness	Horizontal Center of Gravity
(Kg@mm)			(mm)	W (mm)	VCG (mm)	(kg)	ET (mm)	HCG (mm)
F-Series								
2500@600	CYQ25F-B001-920	II	895	920	226	49	62	27
2500@600	CYQ25F-B001-970	II	895	970	226	50.5	62	27
2500@600	CYQ25F-B001-1020	II	895	1020	226	52	62	27
2500@600	CYQ25F-B001-1040	II	895	1040	226	53	62	27
2500@600	CYQ25F-B001-1070	II	1040	1070	226	54	62	27
2500@600	CYQ25F-B001-1100	II	1040	1100	226	55	62	27
2500@600	CYQ25F-B001-1200	II	1040	1200	226	58	62	27
2500@600	CYQ25F-B002-920	II	895	920	226	50	62	27
2500@600	CYQ25F-B002-970	II	895	970	226	51.5	62	27
2500@600	CYQ25F-B002-1020	II	895	1020	226	53	62	27
2500@600	CYQ25F-B002-1040	II	895	1040	226	54	62	27
2500@600	CYQ25F-B002-1070	II	1040	1070	226	55	62	27
2500@600	CYQ25F-B002-1100	II	1040	1100	226	56	62	27
2500@600	CYQ25F-B002-1200	II	1040	1200	226	59	62	27
3500@600	CYQ35F-C001-1070	III	935	1070	293	66	64	29
3500@600	CYQ35F-C001-1100	III	935	1100	293	67	64	29
3500@600	CYQ35F-C001-1115	III	1035	1115	293	68	64	29
3500@600	CYQ35F-C001-1150	III	1035	1150	293	69.5	64	29
3500@600	CYQ35F-C001-1200	III	1035	1200	293	71	64	29
3500@600	CYQ35F-C001-1245	III	1035	1245	293	73	64	29
3500@600	CYQ35F-C001-1300	III	1035	1300	293	74.5	64	29
3500@600	CYQ35F-C001-1350	III	1035	1350	293	77	64	29
3500@600	CYQ35F-C002-1070	III	935	1070	293	69	64	29
3500@600	CYQ35F-C002-1100	III	935	1100	293	70	64	29
3500@600	CYQ35F-C002-1115	III	1035	1115	293	71	64	29
3500@600	CYQ35F-C002-1150	III	1035	1150	293	72.5	64	29
3500@600	CYQ35F-C002-1200	III	1035	1200	293	74	64	29
3500@600	CYQ35F-C002-1245	III	1035	1245	293	76	64	29
3500@600	CYQ35F-C002-1300	III	1035	1300	293	77.5	64	29
3500@600	CYQ35F-C002-1350	III	1035	1350	293	80	64	29
D-Series								
4500@600	CYQ45D-C001-1000	III	895	1000	390	140	64	33
4500@600	CYQ45D-C001-1100	III	965	1100	390	150	64	33
4500@600	CYQ45D-C001-1200	III	1016	1200	390	160	64	33
4500@600	CYQ45D-C001-1250	III	1170	1250	390	200	64	33
4500@600	CYQ45D-C001-1330	III	1210	1330	390	210	64	33
6800@600	CYQ68D-D001-1330	IV	1220	1330	440	240	84	43
6800@600	CYQ68D-D001-1532	IV	1220	1532	440	140	77	43
6800@600	CYQ68D-D001-1670	IV	1372	1670	440	300	84	43
6800@600	CYQ68D-D001-1700	IV	1525	1700	440	300	84	43
6800@600	CYQ68D-D001-1844	IV	1525	1844	440	330	84	43
6800@600	CYQ68D-D001-2400	IV	2085	2400	440	388	84	43