

Single Double Pallet Handlers



Let the
forklift
become a
universal
forklift


Functions & Applications

Flexible application of single or double pallets. Widely used in food and beverage industry, import and export trade and bulking goods industry for stacking operation. Particularly apply to handle and stack goods in container truck.

Features

- Easy operation of single or double pallets
- Easy and fast maintenance
- Stable and durable construction
- Excellent driver visibility

Single Double Pallet Handlers

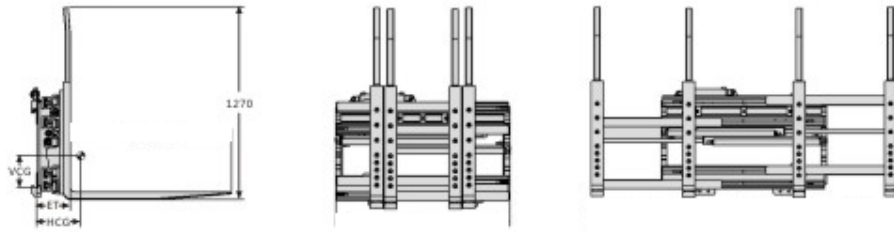

Capacity@ Load Center	Catalog Order No.	Mounting Class	Min.Truck Carriage Width	Frame Width	Weight	Effective Thickness	Horizontal Center of Gravity	Vertical Center of Gravity	Opening Rang ITI	Opening Rang OTO	Avg.Pallet Spread	Fork Set Spread	Fork Size	Backrest Height
(kg@mm)			(mm)	C (mm)	(kg)	ET (mm)	HCG (mm)	VCG (mm)	OTO	(mm)	(mm)	(mm)	(mm)	(mm)
Beverage Pallets (36"×36", 914mm×914mm)														
2500	TPC25D-B001	II	914	1100	490	226	196	227	330-815	660-2035	508	610	1065x86x46	1219
2500	TPC25D-C001	III	914	1100	483	221	191	284	330-815	660-2035	508	610	1065x86x46	1219
2800	TPC28D-C001	III	914	1100	513	226	201	295	330-815	660-2035	508	610	1065x86x46	1219
3200	TPC32D-C001	III	914	1100	549	234	216	287	330-815	660-2035	508	610	1065x86x46	1219
Block and GMA pallets (48"×40", 1219mm×1016mm)														
2200	TPC22D-B001	II	914	1100	510	221	203	274	371-729	701-2101	381	686	1067x81x41	1219
2200	TPC22D-C001	III	914	1100	510	216	198	290	371-729	701-2101	381	686	1067x81x41	1219
2500	TPC25D-C002	III	914	1100	531	226	213	274	371-729	701-2101	381	686	1067x81x46	1219
2500	TPC25D-C003	III	914	1100	526	221	208	282	371-729	701-2101	381	686	1067x81x46	1219
2800	TPC28D-C002	III	914	1100	547	226	224	272	371-729	701-2101	381	686	1067x81x51	1219
3200	TPC32D-C002	III	914	1100	565	234	244	262	371-729	701-2101	381	686	1067x81x61	1219
GMA Pallets (48"×40", 1219mm×1016mm)														
2500	TPC25D-B002	II	914	1100	514	226	221	267	480-787	810-2210	483	711	1067x81x46	1219
2500	TPC25D-C004	III	914	1100	510	221		272	480-787	810-2210	483	711	1067x81x46	1219
2800	TPC28D-C003	III	914	1100	540	226	229	282	480-787	810-2210	483	711	1067x81x51	1219
3200	TPC32D-C003	III	914	1100	578	234	246	272	480-787	810-2210	483	711	1067x81x61	1219
Container Pallets (44"×59", 1118mm×1422mm)														
2500	TPC25D-B003	II	914	1100	542	221	287	246	330-714	660-2035	279	660	1372x81x46	1219
2500	TPC25D-C005	III	914	1100	538	226	284	254	330-714	660-2035	279	660	1372x81x46	1219
2800	TPC28D-C004	III	914	1100	569	234	300	259	330-714	660-2035	279	660	1372x81x51	1219
3200	TPC32D-C004	III	914	1100	617		326	259	330-714	660-2035	279	660	1372x81x61	1219
ISO pallets (1200mm×1100mm)														
2500	TPC25D-C006	III	980	1200	517	221	238	278	330-815	660-2040		640	1150x80x45	1400
2800	TPC28D-C005	III	980	1200	536	226	249	273	330-815	660-2040		640	1150x80x50	1400
3200	TPC32D-C005	III	980	1200	557	236	267	250	330-815	660-2040		640	1150x80x60	1400

Obtain the actual capacity of the forklift and attachments from the forklift manufacturer.

One set additional oil circuit required for Non-sideshifting, two sets additional oil circuit required for sideshifting.