


# Tobacco Carton Clamp

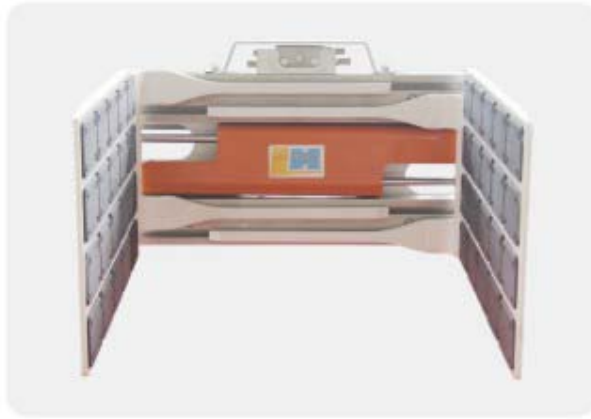

Let the  
forklift  
become a  
universal  
forklift

## Functions & Applications

Tobacco carton clamp can handle and stack various goods packed in cartons, especially redried-tobacco cartons, securely and efficiently without working platform. Measurements of clamp arms can be changed as requested in different working conditions. Furthermore, custom design Tobacco Bag Clamp for special working condition in cigarettes factory is available.



## Features

- Proven durable T-beam arm and aluminum alloy frame construction
- Superior arm-slide bearing for extended service life
- Small rubber pads design, economically
- Regenerative hydraulic valving for optimal arm speed
- Excellent driver visibility

## Options

- Custom opening ranges
- Custom arm size
- Various mounting classes available
- Load backrests

# Tobacco Carton Clamp

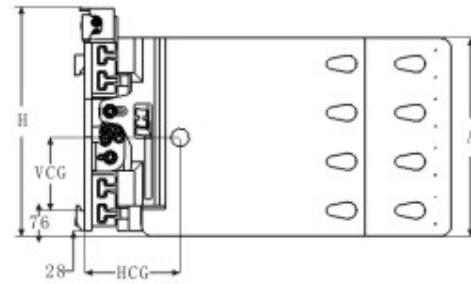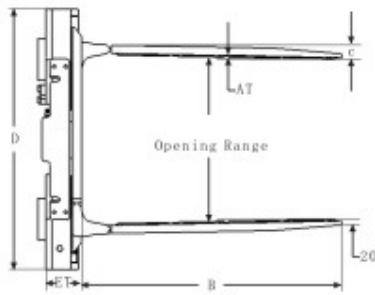

Capacity@ Load Center	Catalog Order No.	Mounting Class	Opening Range	Arm Height	Arm Length	Arm Thickness	Frame Width	Overall Height	Vertical Center of Gravity	Weight	Effective Thickness	Horizontal Center of Gravity
(kg@mm)			(mm)	A (mm)	B (mm)	C(见注4) (mm)	D (mm)	H (mm)	VCG (mm)	(kg)	ET (mm)	HCG (mm)
Sideshifting												
1400@500	YYC14D-B001	II	460-1600	580	930	35	940	665	230	420	127	300
1400@500	YYC14D-B002	II	460-1600	580	1130	35	940	665	240	450	127	380
1300@500	YYC14D-B003	II	460-1600	580	1130	30	940	665	240	430	127	380
1900@500	YYC19D-B001	II	480-1760	580	1130	37	1040	665	240	480	127	380
1900@500	YYC19D-B002	II	480-1760	580	1330	37	1040	665	250	500	127	400

Double cylinders and special valve provide opening/clamping same time with side shifting.

Valve protective plate can effectively protect the valve structure, excellent visible with curve board.

All bearings are made of engineering plastic material, self-lubricant and reliable, easy for replacement.

The grain rubber do not damage the appearance and increase the friction coefficient and stable of clamping.

