


Rotator

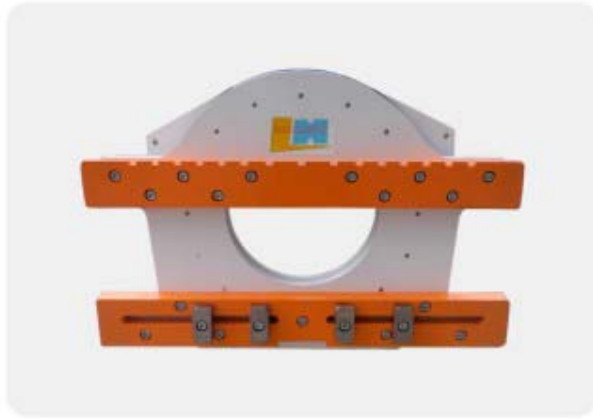

Let the
forklift
become a
universal
forklift



Functions & Applications

Rolling over 360°. Widely used in food industry, chemical industry, sanitation industry, recycle industry, smelting and casting industry, etc.

Features

- Proven durable construction design, unique rotating drive system, meet the high strength continuous operation
- Reduction gear and hydraulic motor hidden at the back of mounting plate, excellent driver visibility
- Strong rotating driving torque achieved the stable and reliable rotating function
- Hydraulic motor fixed with reversible hydraulic lock, any angle position of lock function

Rotator

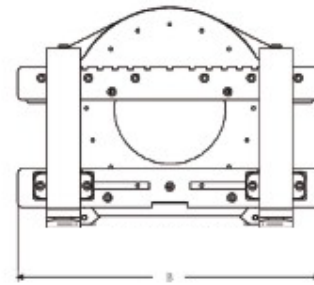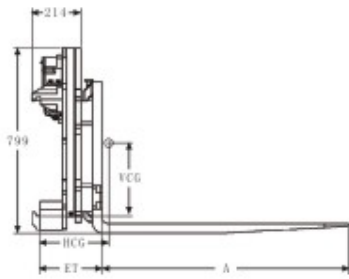

| Capacity@ Load Center | Catalog Order No. | Truck/ Rotator Mounting Class | Rotator/ Fork Mounting Class | Fork Length | Carriage Width | Fork Max. Spacing | Minimum Truck Carriage Width | Vertical Center of Gravity | Weight | Effective Thickness | Horizontal Center of Gravity |
|-----------------------------|----------------------|--|---------------------------------------|----------------|-------------------|----------------------|---------------------------------------|----------------------------------|--------|------------------------|------------------------------------|
| (Kg@mm) | | | | A (mm) | B (mm) | OTO(mm) | (mm) | VCG (mm) | (kg) | ET (mm) | HCG (mm) |
| 3000@500 | XZQ30D-C001 | III | III | 无 | 1100 | 900 | 800 | 286 | 378 | 228 | 149 |
| 3000@500 | XZQ30D-C002 | III | III | 无 | 1115 | 915 | 800 | 286 | 380 | 228 | 149 |
| 3000@500 | XZQ30D-C003 | III | III | 无 | 1150 | 950 | 800 | 286 | 382 | 228 | 149 |
| 3000@500 | XZQ30D-C004 | III | III | 无 | 1200 | 1000 | 800 | 286 | 386 | 228 | 149 |
| 3000@500 | XZQ30D-C005 | III | III | 无 | 1245 | 1045 | 800 | 286 | 390 | 228 | 149 |
| 3000@500 | XZQ30D-C006 | III | III | 无 | 1300 | 1100 | 800 | 286 | 394 | 228 | 149 |
| 3000@500 | XZQ30D-C007 | III | III | 无 | 1350 | 1150 | 800 | 286 | 398 | 228 | 149 |
| 5000@500 | XZQ50D-D001 | IV | III | 无 | 1500 | 1300 | 1300 | 394 | 577 | 300 | 139 |
| 5000@500 | XZQ50D-D002 | IV | III | 无 | 1200 | 1000 | 1300 | 394 | 552 | 300 | 139 |

Obtain the actual capacity of the forklift and attachments from the forklift manufacturer.

One set additional oil circuit required on forklift.

Option forks according to the users' request, please notice fork arms capacity.