

Sideshifting Fork Positioner



Let the
forklift
become a
universal
forklift

Functions & Applications



Sideshifting fork positioner is widely used in logistic industry, warehouse and manufacturing industry, etc. Adjust forks without leaving the seat.

Features


- Excellent driver visibility and secure operation.
- Self-lubricate bearing for extended the service life.
- Adjustable fork carriage for various forks.
- Easy and fast maintenance

Sideshifting Fork Positioner

K-Series

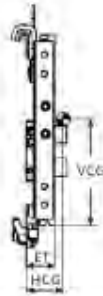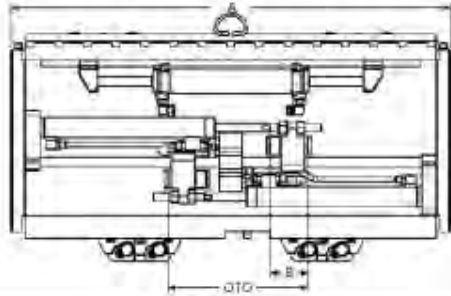

H-Series

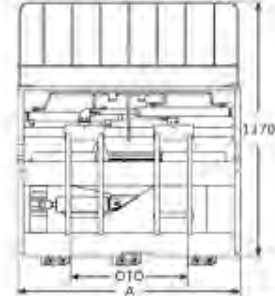

Capacity@ Load Center	Catalog Order No.	Mounting Class	Opening Range	Carriage Width	Fork Pocket Width	Vertical Center of Gravity	Weight	Effective Thickness	Horizontal Center of Gravity
(kg@mm)			OTO(mm)	W (mm)	(mm)	VCG (mm)	(kg)	ET (mm)	HCG (mm)
K-Series									
2500@600	TJC25D-B001-920	II	215-780	920	80-100	226	59	62	27
2500@600	TJC25D-B001-970	II	215-830	970	80-100	226	60	62	27
2500@600	TJC25D-B001-1020	II	215-880	1020	80-100	226	64	62	27
2500@600	TJC25D-B001-1040	II	215-900	1040	80-100	226	67	62	27
2500@600	TJC25D-B001-1070	II	215-930	1070	80-100	226	69	62	27
2500@600	TJC25D-B001-1100	II	215-960	1100	80-100	226	70	62	27
2500@600	TJC25D-B001-1200	II	215-1060	1200	80-100	226	71	62	27
3500@600	TJC30D-C001-1070	III	275-930	1070	100-130	293	77	68	29
3500@600	TJC30D-C001-1100	III	275-1000	1100	100-130	293	78	68	29
3500@600	TJC30D-C001-1115	III	275-1015	1115	100-130	293	80	68	29
3500@600	TJC30D-C001-1150	III	275-1050	1150	100-130	293	80	68	29
3500@600	TJC30D-C001-1200	III	275-1100	1200	100-130	293	83	68	29
H-Series									
4500@600	TJC45D-C001-1000	III	674-810	1000	125-150	550	211	86	84
4500@600	TJC45D-C001-1100	III	674-910	1100	125-150	550	225	86	84
4500@600	TJC45D-C001-1200	III	674-1010	1200	125-150	550	240	86	84
4500@600	TJC45D-C001-1250	III	674-1060	1250	125-150	550	253	86	84
4500@600	TJC45D-C001-1330	III	674-1140	1330	125-150	550	262	86	84